

## Surface Mount Resettable PTCs

### SMD1206 Series

#### Description


The SMD1206 Series PTC provides surface mount over-current protection for applications where space is at a premium and resettable protection is desired.

#### Features

- u RoHS compliant, Lead-Free and Halogen-Free
- u Fast time-to-trip
- u Compact design saves board space
- u Low resistance
- u Low-profile

#### Applicable

- u PC motherboard - plug and play protection
- u Mobile phones - battery and port protection
- u Game console port protection
- u USB peripherals
- u Disk drive
- u PDAS / digital cameras
- u Power ports
- u General electronics

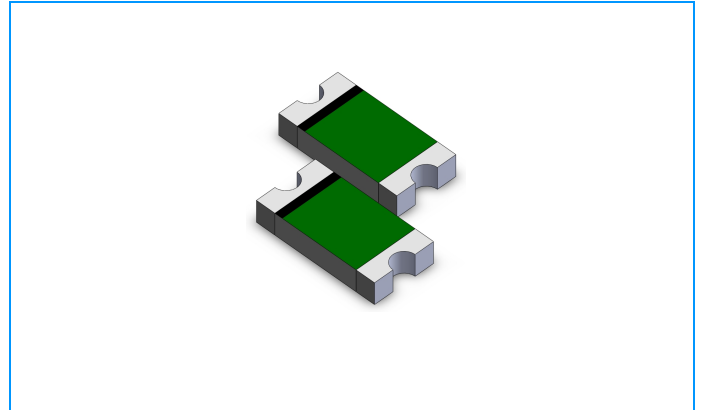

#### Electrical Parameters

Part Number	Hold Current	Trip Current	Rated Voltage	Max Current	Typical Power	Maximum Time To Trip		Resistance	
	$I_{hold}$ (A)	$I_{trip}$ (A)	$V_{max}$ (Vdc)	$I_{max}$ (A)	$P_{dtyp.}$ (W)	Current (A)	Time (Sec.)	$R_{min}$ ( $\Omega$ )	$R_{1max}$ ( $\Omega$ )
SMD1206-005	0.05	0.15	60	10	0.4	0.25	1.50	3.600	50.000
SMD1206-010	0.10	0.25	60	10	0.4	0.50	1.00	1.600	15.000
SMD1206-012	0.12	0.29	60	100	0.4	0.50	1.00	1.600	15.000
SMD1206-020	0.20	0.46	30	100	0.6	8.00	0.08	0.350	2.700
SMD1206-025	0.25	0.50	16	100	0.6	8.00	0.08	0.350	2.500
SMD1206-035	0.35	0.75	6	100	0.6	8.00	0.10	0.250	1.300
SMD1206-050	0.50	1.00	6	100	0.6	8.00	0.10	0.150	0.700
SMD1206-050/13.2V	0.50	1.00	13.2	100	0.6	8.00	0.10	0.150	0.700
SMD1206-075	0.75	1.50	6	100	0.6	8.00	0.20	0.090	0.500
SMD1206-100	1.00	1.80	6	100	0.6	8.00	0.30	0.055	0.270
SMD1206-110	1.10	2.20	6	100	0.6	8.00	0.30	0.050	0.250
SMD1206-150	1.50	3.00	6	100	0.8	8.00	1.00	0.040	0.130
SMD1206-200	2.00	3.50	6	100	0.8	8.00	1.50	0.018	0.080

$I_{hold}$  = Hold current: maximum current device will pass without tripping in 23°C still air.

$I_{trip}$  = Trip current: minimum current at which the device will trip in 23°C still air.

$V_{max}$  = Maximum voltage device can withstand without damage at rated current ( $I_{max}$ )

$I_{max}$  = Maximum fault current device can withstand without damage at rated voltage ( $V_{max}$ )

$P_{dtyp.}$  = Power dissipated from device when in the tripped state at 23°C still air.



$R_{min}$  = Minimum resistance of device in initial (un-soldered) state.

$R_{1max}$  = Maximum resistance of device at 23°C measured one hour after tripping.

Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.


## Surface Mount Resettable PTCs

### SMD1206 Series

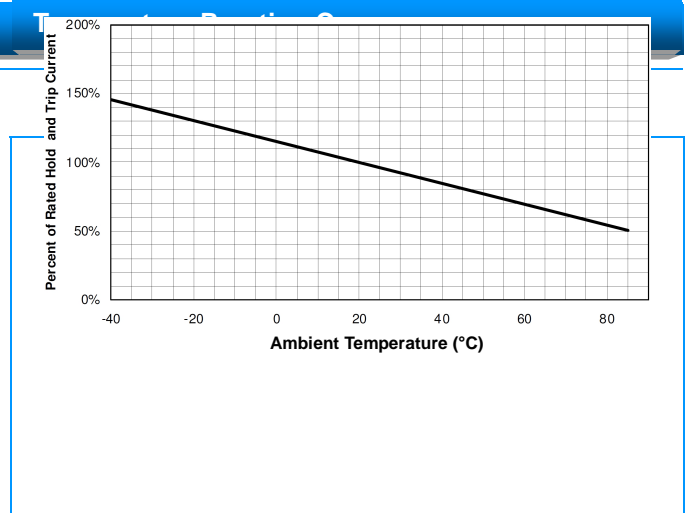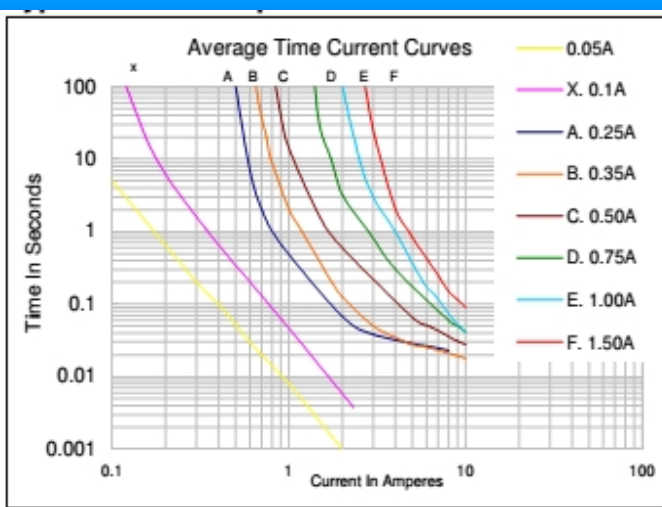

<b>Terminal pad material</b>	Pure Tin
<b>Soldering Characteristics</b>	Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3

### Soldering Parameters

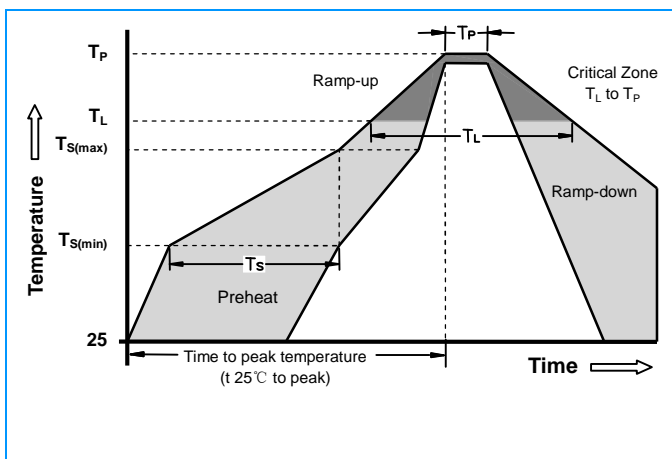

Profile Feature	Pb-Free Assembly
<b>Average Ramp-Up Rate (<math>T_S \text{ max to } T_P</math>)</b>	3°C/second max.
<b>Preheat :</b>	
Temperature Min ( $T_{Smin}$ )	150°C
Temperature Max ( $T_{Smax}$ )	200°C
Time ( $T_{Smin}$ to $T_{Smax}$ )	60-180 seconds
<b>Time maintained above:</b>	
Temperature( $T_L$ )	217°C
Time ( $t_L$ )	60-150 seconds
<b>Peak/Classification Temperature(<math>T_P</math>):</b>	260°C
<b>Time within 5°C of actual peak:</b>	
Temperature	20-40 seconds
<b>Ramp-down Rate:</b>	6°C/ second max.
<b>Time 25°C to Peak Temperature</b>	8 minutes max.

Note: All temperatures refer to of the package, measured on the package body surface.

# Surface Mount Resettable PTCs

## SMD1206 Series

### Solder reflow

Due to "Lead Free" nature, Temperature and Dwelling time for the soldering zone is higher than those for Regular. This may cause damage to other components.

1. Recommended max past thickness > 0.25mm.
2. Devices can be cleaned using standard methods and aqueous solvent.
3. Rework use standard industry practices.
4. Storage Environment : < 30°C / 60%RH

### Caution:


1. If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
2. Devices are not designed to be wave soldered to the bottom side of the board.

### Part Numbering

### Part Marking


### Pad Layouts Unit: mm

The dimension in the table below provide the recommended pad layout for each SMD1206 device

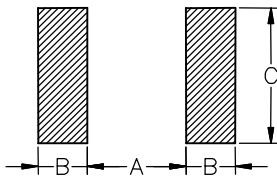

Device	A	B	C
	Nominal	Nominal	Nominal
1206 Series	2.00	1.00	1.90

### Dimensions Unit: mm



Part Number	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD1206-005	3.00	3.50	1.50	1.80	0.60	1.10	0.15	0.10
SMD1206-010	3.00	3.50	1.50	1.80	0.60	1.10	0.15	0.10
SMD1206-012	3.00	3.50	1.50	1.80	0.60	1.10	0.15	0.10
SMD1206-020	3.00	3.50	1.50	1.80	0.40	0.90	0.15	0.10
SMD1206-025	3.00	3.50	1.50	1.80	0.40	0.90	0.15	0.10
SMD1206-035	3.00	3.50	1.50	1.80	0.40	0.90	0.15	0.10
SMD1206-050	3.00	3.50	1.50	1.80	0.35	0.85	0.15	0.10

## Surface Mount Resettable PTCs

### SMD1206 Series


SMD1206-050/13.2V	3.00	3.50	1.50	1.80	0.35	0.85	0.15	0.10
SMD1206-075	3.00	3.50	1.50	1.80	0.30	0.80	0.15	0.10
SMD1206-100	3.00	3.50	1.50	1.80	0.40	0.80	0.15	0.10
SMD1206-110	3.00	3.50	1.50	1.80	0.40	0.80	0.15	0.10
SMD1206-150	3.00	3.50	1.50	1.80	0.50	1.20	0.15	0.10
SMD1206-200	3.00	3.50	1.50	1.80	0.50	1.20	0.15	0.10

### Ihold Versus Temperature

Model	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
SMD1206-005	0.074	0.066	0.058	0.05	0.0425	0.038	0.035	0.03	0.0275
SMD1206-010	0.148	0.132	0.116	0.10	0.085	0.075	0.07	0.06	0.055
SMD1206-012	0.18	0.16	0.14	0.12	0.10	0.09	0.08	0.07	0.07
SMD1206-020	0.30	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.11
SMD1206-025	0.37	0.33	0.29	0.25	0.22	0.20	0.17	0.15	0.12
SMD1206-035	0.50	0.45	0.40	0.35	0.30	0.27	0.24	0.21	0.15
SMD1206-050	0.71	0.64	0.57	0.50	0.42	0.39	0.35	0.31	0.25
SMD1206-050/13.2V	0.71	0.64	0.57	0.50	0.42	0.39	0.35	0.31	0.25
SMD1206-075	1.14	1.01	0.88	0.75	0.65	0.59	0.54	0.49	0.41
SMD1206-100	1.45	1.31	1.15	1.00	0.84	0.77	0.69	0.61	0.48
SMD1206-150	2.18	1.94	1.72	1.50	1.28	1.17	1.06	0.96	0.77
SMD1206-200	2.88	2.63	2.34	2.00	1.74	1.58	1.42	1.17	0.93

Maximum ambient operating temperature (T<sub>mao</sub>) vs. hold current (I<sub>hold</sub>)

### Tape and Reel Specifications

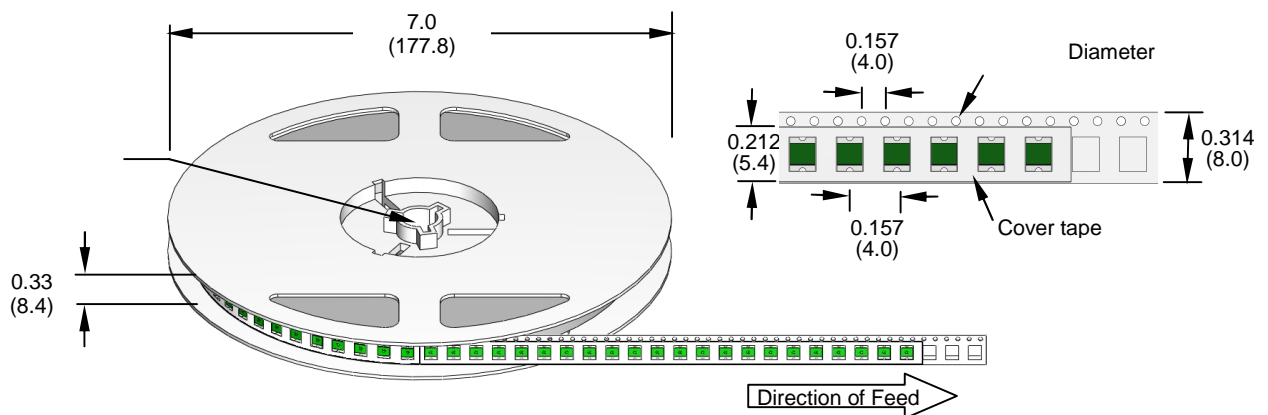

Dimensions are in inches  
(and millimeters)



## Surface Mount Resettable PTCs

### SMD1206 Series

#### Warning



- ⌌ Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- ⌌ PPTC device are intended for occasional over-current protection. Application for repeated over-current condition and/or prolonged trip are not anticipated.
- ⌌ Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.