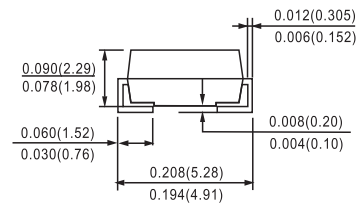
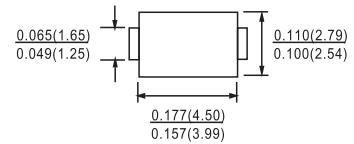


FEATURES

- For surface mount applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction
- High temperature soldering : 260°C/10seconds at terminals
- Pb free product are available : 99% Sn above can meet RoHS Environment substance directive request

MECHANICAL DATA

Case : JEDEC DO-214AA molded plastic
 Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity : Indicated by cathode band
 Standard packaging : 16mm tape (EIA-481)
 Weight : 0.003 ounce, 0.093grams

DO-214AC(SMA)


Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified
 Single phase, half wave, 60Hz, resistive or inductive load
 For capacitive load, derate current by 20%

	SYMBOL	ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	UNITS	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	Volts	
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	Volts	
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	Volts	
Maximum Average Forward Rectified Current @ $T_L = 100^\circ C$	$I_{(AV)}$	1.0							Amps	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	30							Amps	
Maximum Instantaneous Forward Voltage at 1.0A	V_F	0.95			1.25		1.7		Volts	
Maximum DC Reverse Current @ $T_J = 25^\circ C$ at Rated DC Blocking Voltage @ $T_J = 100^\circ C$	I_R	5.0				100				μA
Maximum Reverse Recovery Time (NOTE 1)	T_{RR}	35								nS
Typical Junction Capacitance (NOTE 2)	C_J	10								pF
Typical Thermal Resistance (NOTE 3)	$R_{\theta JA}$	34								$^\circ C / W$
Operating and Storage Temperature Range	T_J T_{STG}	-55 to +150							$^\circ C$	

NOTES :

1. Reverse Recovery Test Conditions $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$
2. Measured at 1 MHz and applied reverse Voltage of 4.0VDC
3. $8.0mm^2$ (.013mm thick) land areas

RATINGS AND CHARACTERISTIC CURVES ES1A THRU ES1J

Fig. 1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM ES1A THRU ES1G

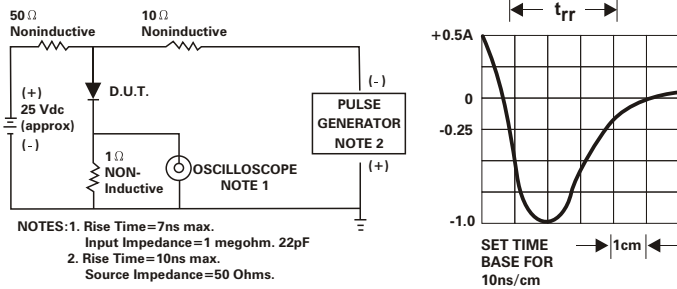


Fig. 2 - MAXIMUM AVERAGE FORWARD CURRENT RATING

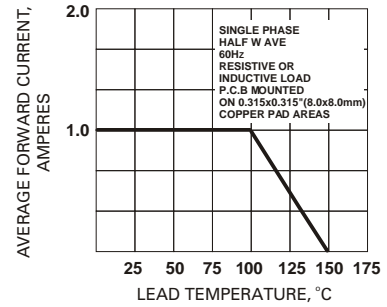


Fig. 3 - TYPICAL REVERSE CHARACTERISTICS

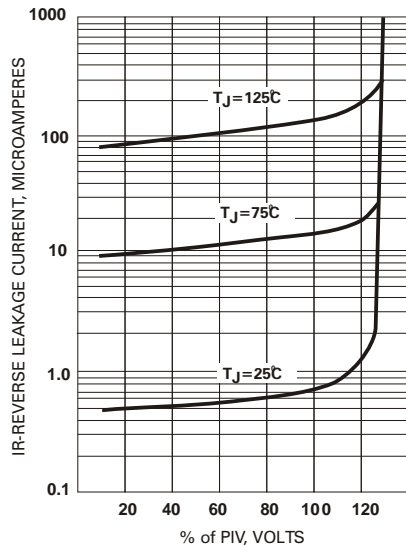


Fig. 4 - TYPICAL FORWARD CHARACTERISTICS

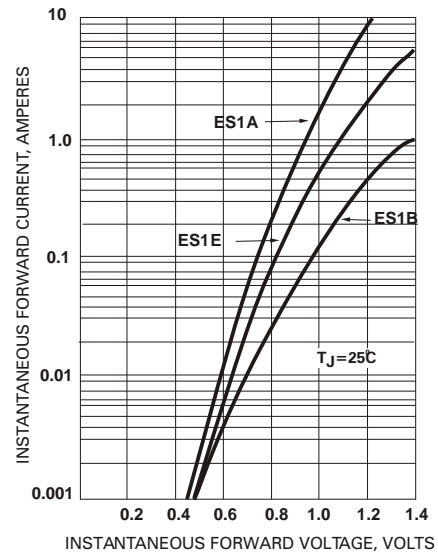


Fig. 5 - MAXIMUM NON-REPETITIVE SURGE CURRENT

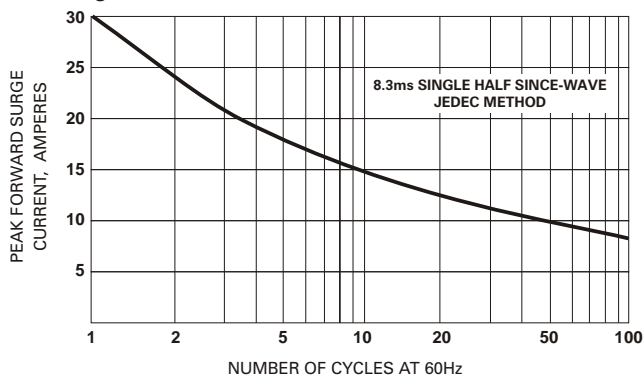


Fig. 6 - TYPICAL JUNCTION CAPACITANCE

