

Standard Avalanche Surface Mount Rectifiers

eSMP® Series



DO-220AA (SMP)

 AUTOMOTIVE GRADE Available



**RoHS
COMPLIANT
HALOGEN
FREE**

FEATURES

- Very low profile - typical height of 1.0 mm
- Ideal for automated placement
- Controlled avalanche characteristics
- Low forward voltage drop
- Low leakage current
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- AEC-Q101 qualified
- Material categorization: For definitions of compliance

PRIMARY CHARACTERISTICS	
I _{F(AV)}	1.5 A
V _{RRM}	200 V, 400 V, 600 V, 800 V, 1000 V
I _{FSM}	30 A
I _R	0.3 µA
V _F at I _F = 1.5 A	0.89 V
E _{AS}	20 mJ
T _J max.	175 °C
Package	DO-220AA (SMP)
Diode variations	Single die

TYPICAL APPLICATIONS

For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer, automotive, and telecommunication.

MECHANICAL DATA

Case: DO-220AA (SMP)

Molding compound meets UL 94 V-0 flammability rating
Base P/N-M3 - halogen-free, RoHS-compliant, and commercial grade

Base P/NHM3 - halogen-free, RoHS-compliant, and automotive grade

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102

M3 suffix meets JESD 201 class 1A whisker test, HM3 suffix meets JESD 201 class 2 whisker test

Polarity: Color band denotes cathode end

MAXIMUM RATINGS (T_A = 25 °C unless otherwise noted)							
PARAMETER	SYMBOL	AS1PD	AS1PG	AS1PJ	AS1PK	AS1PM	UNIT
Device marking code		ASD	ASG	ASJ	ASK	ASM	
Max. repetitive peak reverse voltage	V _{RRM}	200	400	600	800	1000	V
Max. DC forward current (see fig. 1)	I _F ⁽¹⁾			1.5			A
Peak forward surge current 10 ms single half sine-wave superimposed on rated load	I _{FSM}			30			A
Non-repetitive avalanche energy at I _{AS} = 1.0 A, T _A = 25 °C	E _{AS}			20			mJ
Operating junction and storage temperature range	T _J , T _{STG}			- 55 to + 175			°C

Note

⁽¹⁾ Mounted on 5 mm x 5 mm pad areas PCB

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)						
PARAMETER	TEST CONDITIONS		SYMBOL	TYP.	MAX.	UNIT
Instantaneous forward voltage	$I_F = 1.0 \text{ A}$	$T_A = 25^\circ\text{C}$	$V_F^{(1)}$	0.95	-	V
		$T_A = 125^\circ\text{C}$		0.84	-	
	$I_F = 1.5 \text{ A}$	$T_A = 25^\circ\text{C}$		0.99	1.15	
		$T_A = 125^\circ\text{C}$		0.89	1.0	
Reverse current	Rated V_R	$T_A = 25^\circ\text{C}$	$I_R^{(2)}$	0.3	5	μA
		$T_A = 125^\circ\text{C}$		35	100	
Typical reverse recovery time	$I_F = 0.5 \text{ A}, I_R = 1.0 \text{ A}, I_{rr} = 0.25 \text{ A}$		t_{rr}	1.5	-	μs
Typical junction capacitance	4.0 V, 1 MHz		C_J	10.4	-	pF

Notes

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width $\leq 40 \text{ ms}$

THERMAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	AS1PD	AS1PG	AS1PJ	AS1PK	AS1PM	UNIT
Typical thermal resistance	$R_{\theta JA}^{(1)}$			115			$^\circ\text{C/W}$
	$R_{\theta JM}^{(1)}$			15			

Note

(1) Unit mounted on PCB with 5 mm x 5 mm copper pad areas. Thermal resistance $R_{\theta JA}$ - junction to ambient, $R_{\theta JM}$ - junction to mount at the terminal of cathode band

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
AS1PJ-M3/84A	0.024	84A	3000	7" diameter plastic tape and reel
AS1PJ-M3/85A	0.024	85A	10 000	13" diameter plastic tape and reel
AS1PJHM3/84A ⁽¹⁾	0.024	84A	3000	7" diameter plastic tape and reel
AS1PJHM3/85A ⁽¹⁾	0.024	85A	10 000	13" diameter plastic tape and reel

Note

(1) Automotive grade

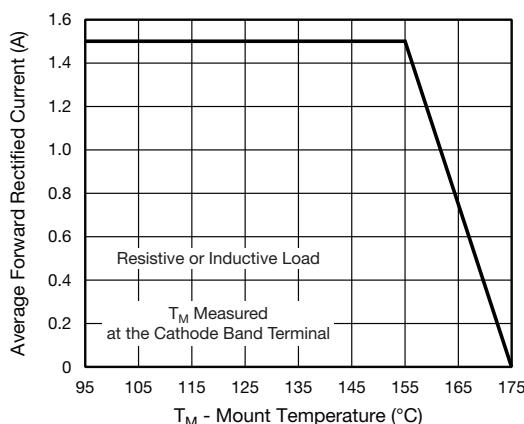
RATINGS AND CHARACTERISTICS CURVES ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Fig. 1 - Max. Forward Current Derating Curve

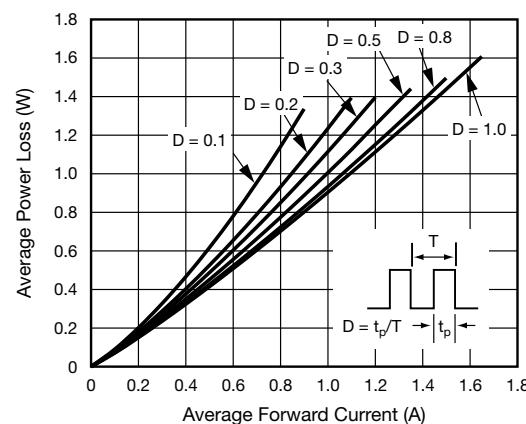


Fig. 2 - Forward Power Loss Characteristics

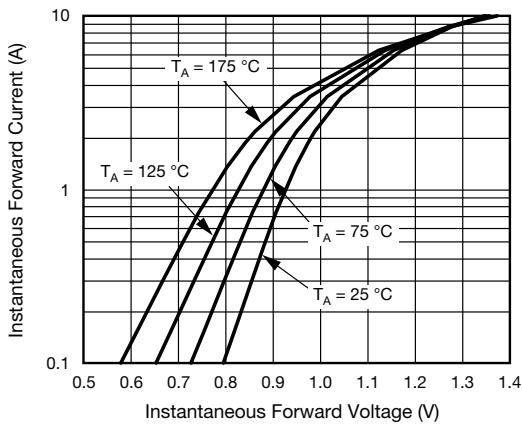


Fig. 3 - Typical Instantaneous Forward Characteristics

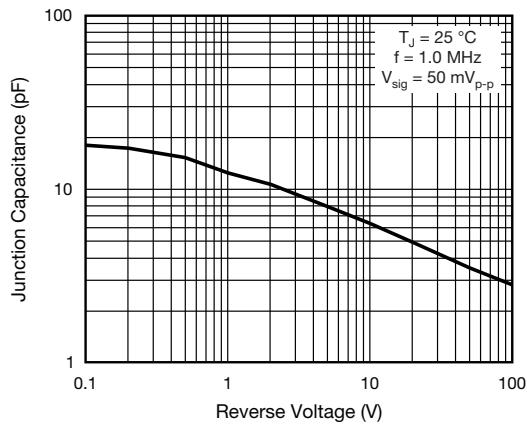


Fig. 5 - Typical Junction Capacitance

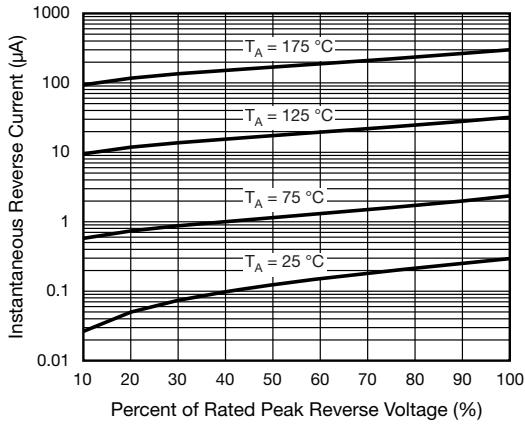


Fig. 4 - Typical Reverse Characteristics

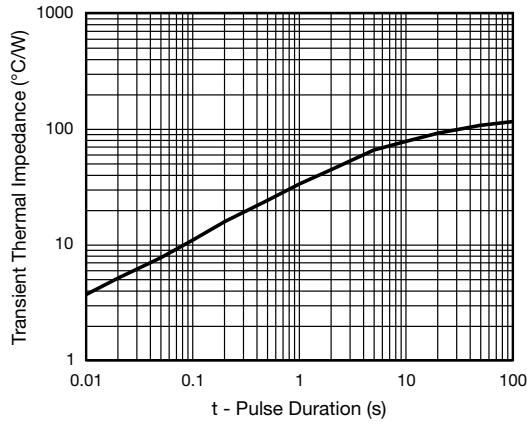


Fig. 6 - Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-220AA (SMP)

