



SEP ELECTRONIC CORP.

SF61 thru SF67

6.0 A Super Fast Recovery Rectifier

Rectifier Reverse Voltage 50 to 600V



DO-27

Features

- Diffused junction
- Fast switching for high efficiency
- High current capability and low Forward Voltage Drop
- Surge overload rating to 150A peak
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

Mechanical Data


Case: Molded plastic

Terminals: Solder plated solderable per MIL-STD-202,
Method 208

Polarity: Cathode band

Mounting Position: Any

Weight: 1.10 grams (approx)

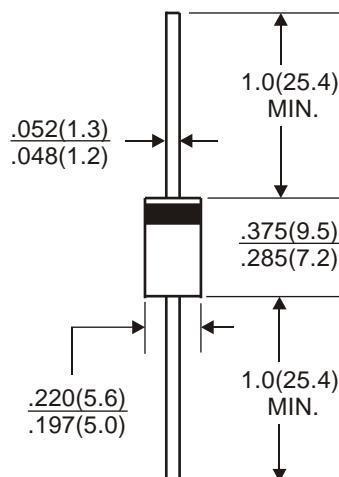

All dimensions inches and (millimeters)

Maximum Ratings & Thermal CharacteristicsRating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	SF61	SF62	SF63	SF64	SF65	SF66	SF67	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	150	200	300	400	600	V
Maximum RMS bridge input voltage	VRMS	35	70	105	140	210	280	420	V
Maximum DC blocking voltage	VDC	50	100	150	200	300	400	600	V
Maximum average forward rectified output current at TA=55°C	IF(AV)					6.0			A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM					150			A
Maximum reverse recovery time TJ=25°C	Trr					35			nS
Typical thermal resistance per element	ReJA					20			°C/W
Typical junction capacitance per element	Cj					50			pF
Operating junction and storage temperature range	TJ, TSTG					-55 to + 150			°C

Electrical CharacteristicsRating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	SF61	SF62	SF63	SF64	SF65	SF66	SF67	Unit
Maximum instantaneous forward voltage drop per leg at 6.0A	VF			0.95		1.25		1.50	V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C	IR			10		100			μA

Rating and Characteristic Curves ($T_A = 25^\circ\text{C}$ Unless otherwise noted)
SF61 thru SF67

Fig. 1 Reverse Recovery Time and Test Circuit Diagram

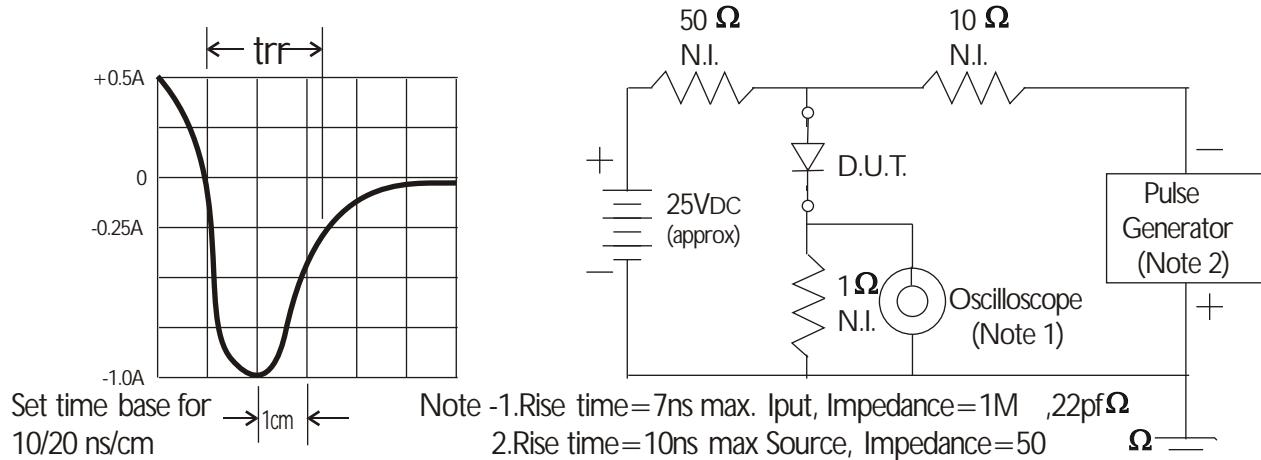


Fig. 2 Derating Curve for Output Rectified Current

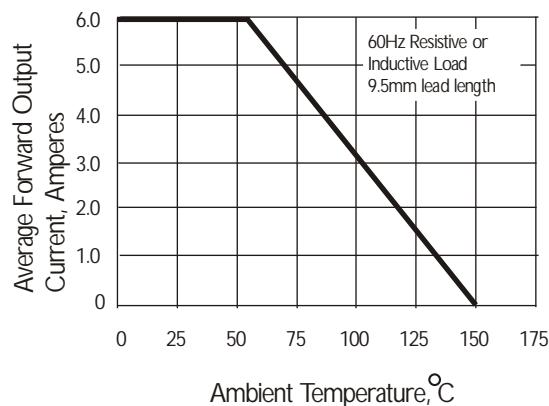


Fig. 4 Typical Instantaneous Forward Characteristics

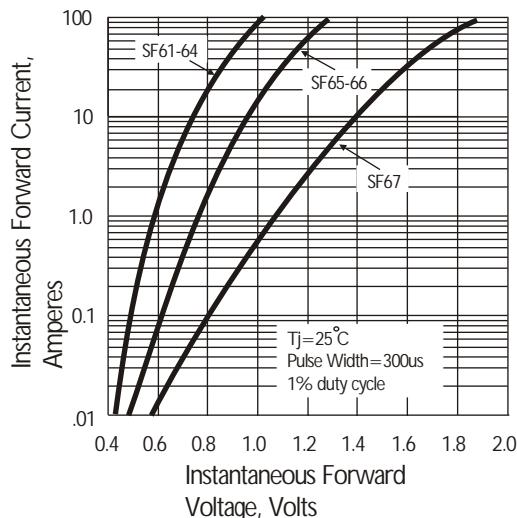


Fig. 3 Peak Forward Surge Current

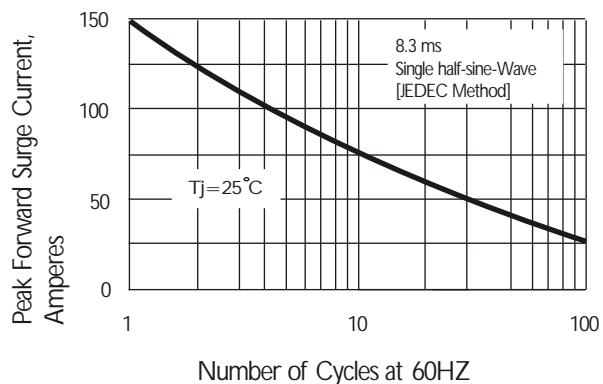


Fig. 5 Typical Junction Capacitance

