

## HZ6L Series

$V_Z$  : 6.0 - 36V

$P_D$  : 400mW

### FEATURES :

- \* Low leakage, low zener impedance
- \* Maximum power dissipation of 400 mW
- \* Ideally suited for stabilized power supply, etc.
- \* Pb / RoHS Free


### MECHANICAL DATA :

**Case:** DO-35 Glass Case

**Weight:** approx. 0.13g

## ZENER DIODES

DO - 35 Glass  
(DO-204AH)

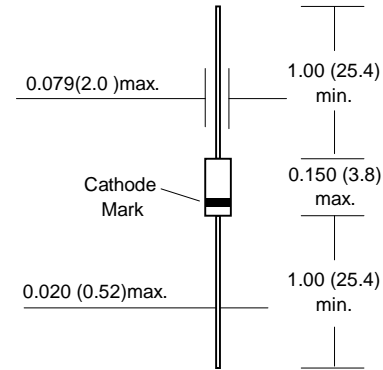

Dimensions in inches and ( millimeters )

### Maximum Ratings and Thermal Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Zener Current see Table "Characteristics"			
Power Dissipation at Ta = 75 °C	$P_D$	400	mW
Junction temperature	$T_J$	175	°C
Storage temperature range	$T_S$	-65 to + 175	°C

## Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified

Type No.	Grade	Zener Voltage $V_Z @ I_{ZT}$						Test Current $I_{ZT}$ (mA)	Maximum Dynamic Resistance $r_d @ I_Z$ ( $\Omega$ )   (mA)		Maximum Reverse Current $I_R @ V_R$ ( $\mu A$ )   (V)	
		Suffix-1		Suffix-2		Suffix-3						
		min. (V)	max. (V)	min. (V)	max. (V)	min. (V)	max. (V)					

### HZ6L Series. 0.4 Watt. Case : DO-35 Glass

HZ6L	A	5.2	5.5	5.3	5.6	5.4	5.7	0.5	150	0.5	1.0	2.0
	B	5.5	5.8	5.6	5.9	5.7	6.0	0.5	80	0.5	1.0	2.0
	C	5.8	6.1	6.0	6.3	6.1	6.4	0.5	60	0.5	1.0	2.0
HZ7L	A	6.3	6.6	6.4	6.7	6.6	6.9	0.5	60	0.5	1.0	3.5
	B	6.7	7.0	6.9	7.2	7.0	7.3	0.5	60	0.5	1.0	3.5
	C	7.2	7.6	7.3	7.7	7.5	7.9	0.5	60	0.5	1.0	3.5
HZ9L	A	7.7	8.1	7.9	8.3	8.1	8.5	0.5	60	0.5	1.0	6.0
	B	8.3	8.7	8.5	8.9	8.7	9.1	0.5	60	0.5	1.0	6.0
	C	8.9	9.3	9.1	9.5	9.3	9.7	0.5	60	0.5	1.0	6.0
HZ11L	A	9.5	9.9	9.7	10.1	9.9	10.3	0.5	80	0.5	1.0	8.0
	B	10.2	10.6	10.4	10.8	10.7	11.1	0.5	80	0.5	1.0	8.0
	C	10.9	11.3	11.1	11.6	11.4	11.9	0.5	80	0.5	1.0	8.0
HZ12L	A	11.6	12.1	11.9	12.4	12.2	12.7	0.5	80	0.5	1.0	10.5
	B	12.4	12.9	12.6	13.1	12.9	13.4	0.5	80	0.5	1.0	10.5
	C	13.2	13.7	13.5	14.0	13.8	14.3	0.5	80	0.5	1.0	10.5
HZ15L		14.1	14.7	14.5	15.1	14.9	15.5	0.5	80	0.5	1.0	13
HZ16L		15.3	15.9	15.7	16.5	16.3	17.1	0.5	80	0.5	1.0	14
HZ18L		16.9	17.7	17.5	18.3	18.1	19.0	0.5	80	0.5	1.0	15
HZ20L		18.8	19.7	19.5	20.4	20.2	21.1	0.5	100	0.5	1.0	18
HZ22L		20.9	21.9	21.6	22.6	22.3	23.3	0.5	100	0.5	1.0	20
HZ24L		22.9	24.0	23.6	24.7	24.3	25.5	0.5	120	0.5	1.0	22
HZ27L		25.2	26.6	26.2	27.6	27.2	28.6	0.5	150	0.5	1.0	24
HZ30L		28.2	29.6	29.2	30.6	30.2	31.6	0.5	200	0.5	1.0	27
HZ33L		31.2	32.6	32.2	33.6	33.2	34.6	0.5	250	0.5	1.0	30
HZ36L		34.2	35.7	35.3	36.8	36.4	38.0	0.5	300	0.5	1.0	33

**Note:**

Type No. show as follows, HZ6A1L, HZ6A2L ..... HZ36-3L